

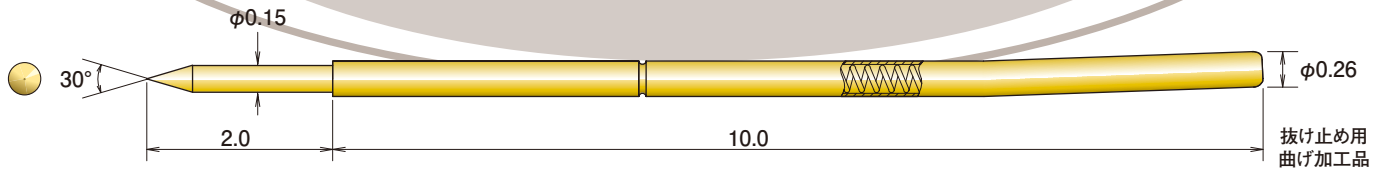
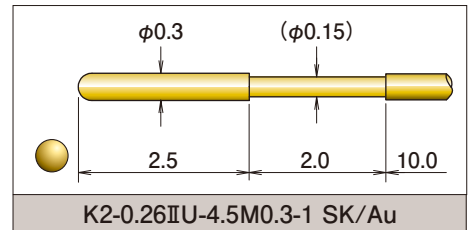
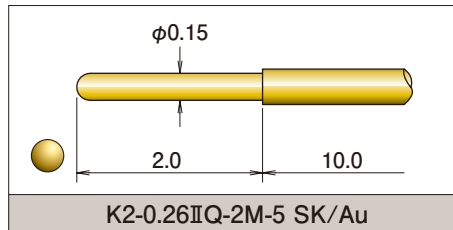
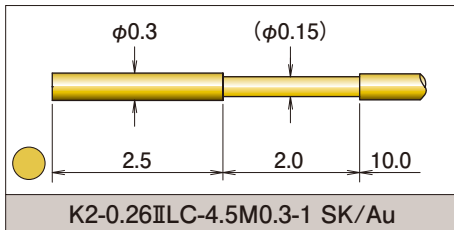
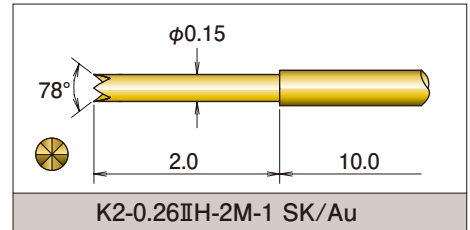
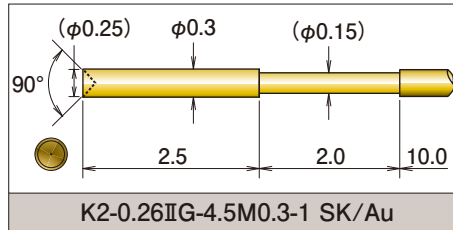
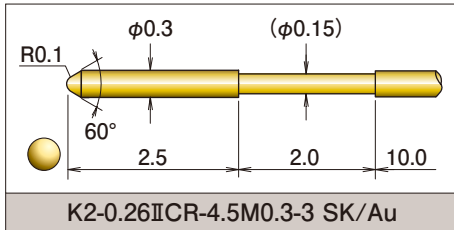
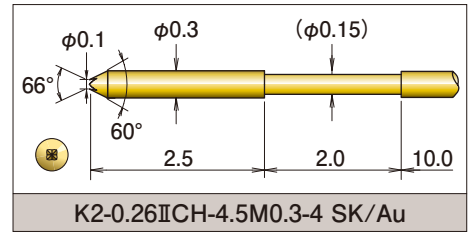


For 0.5 mm pitch K2-0.26II series


(単位:mm)

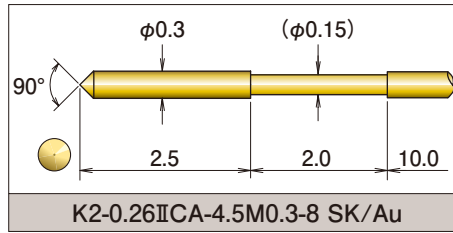


推奨ストローク	荷重	MAXストローク	スプリング耐久回数	初期荷重	固有抵抗 (typ.)	最大許容電流 (typ.)	使用温度
1.32mm	16gf	2.0mm	10万回	3gf	250mΩ	0.2A	-45~125℃

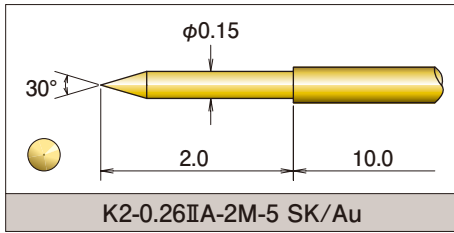

● リセプタクル Receptacle

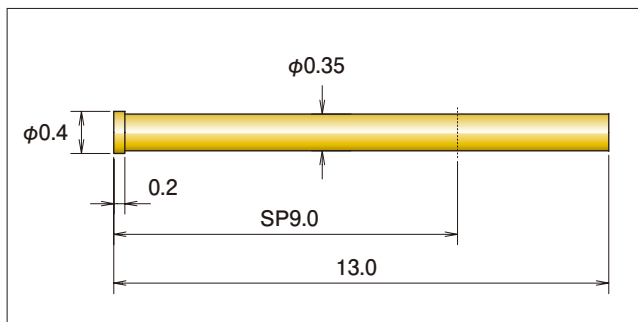

K2-0.26S-1-N-SP9-2
(S026-A090-2N)

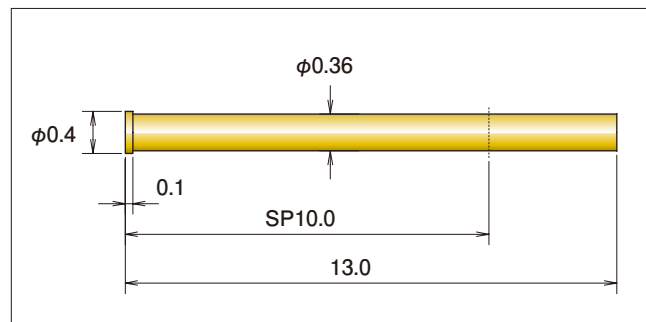

K2-0.26S-1-N-SP10-2
(S026-A100-2N)