

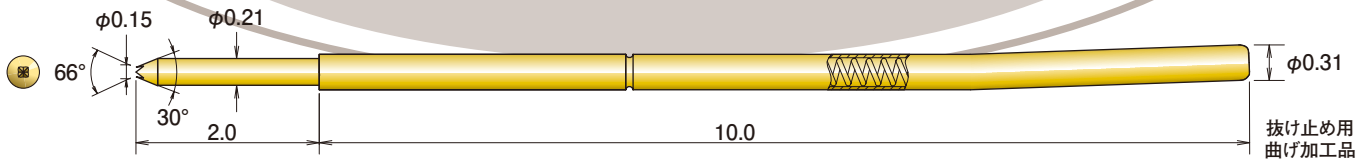
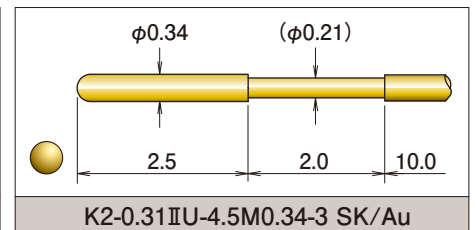
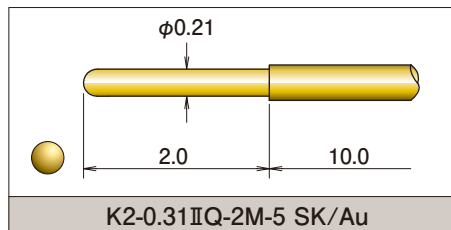
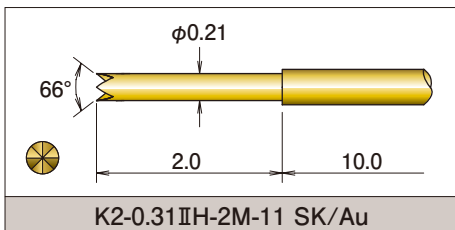
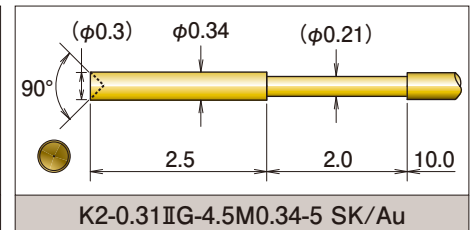
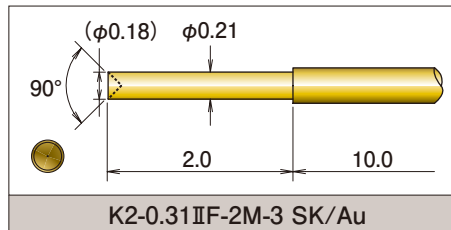
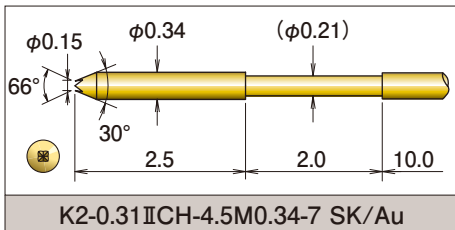
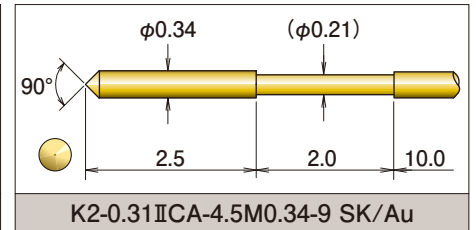


For 0.7 mm pitch K2-0.31 II series


(単位:mm)

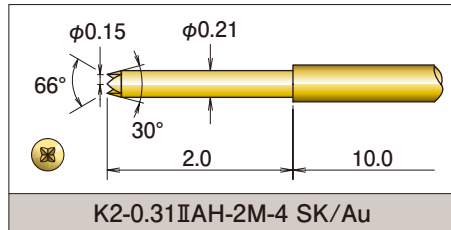


推奨ストローク	荷重	MAXストローク	スプリング耐久回数	初期荷重	固有抵抗 (typ.)	最大許容電流 (typ.)	使用温度
1.33mm	25gf	2.0mm	6万回	5gf	180mΩ	0.5A	-45~125°C

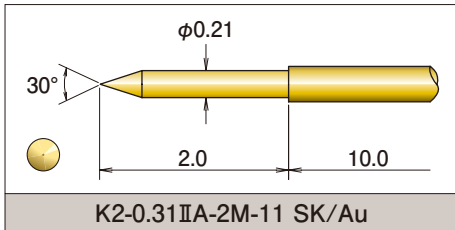

リセプタクル Receptacle

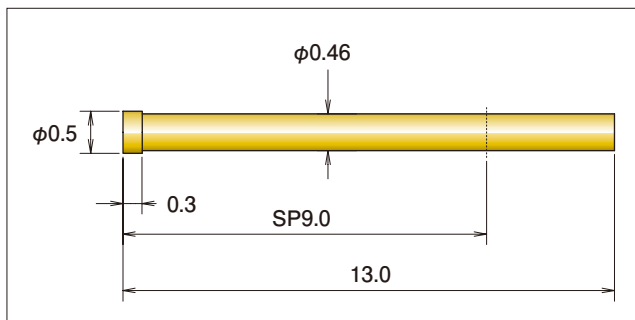

K2-0.31S-1-N-SP9-2
(S031-090-04-N)

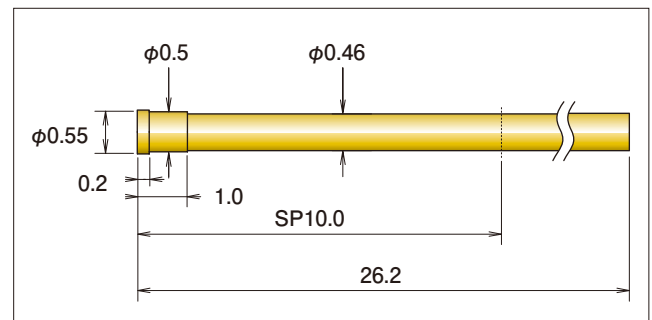

K2-0.31S-2-N-26.2L-2
(S031-100-05-N)