

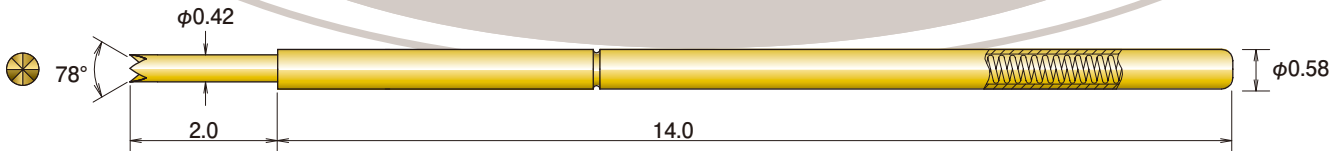
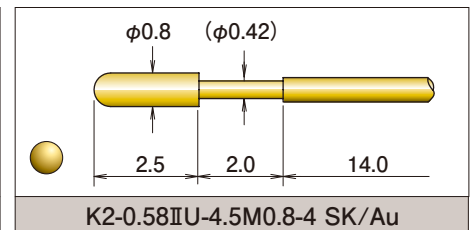
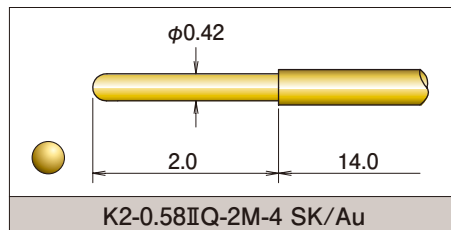
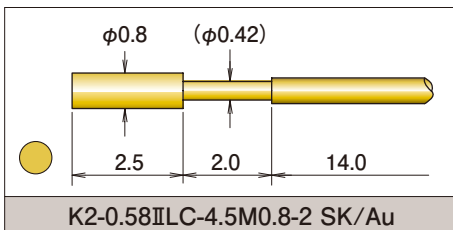
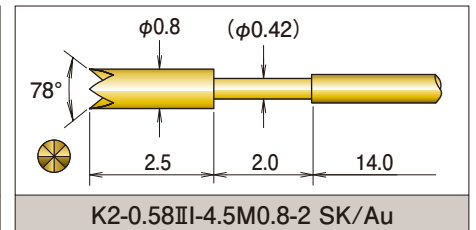
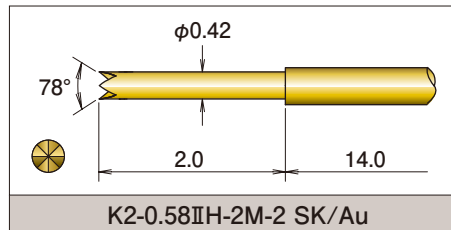
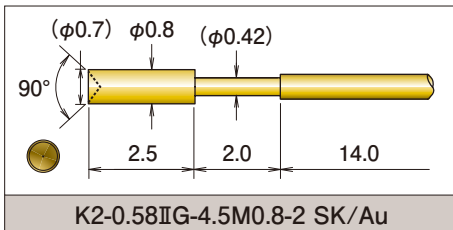
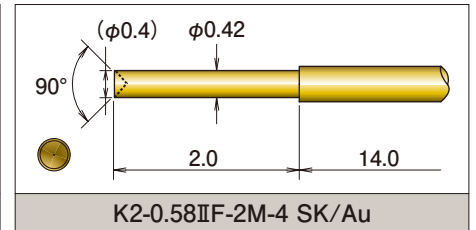


For 1.0 mm pitch K2-0.58II series


(単位:mm)

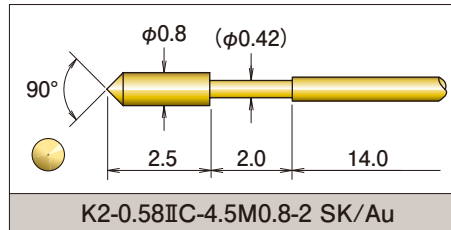


推奨ストローク	荷重	MAXストローク	スプリング耐久回数	初期荷重	固有抵抗 (typ.)	最大許容電流 (typ.)	使用温度
1.33mm	50gf	2.0mm	10万回	26gf	60mΩ	1.0A	-45~125°C

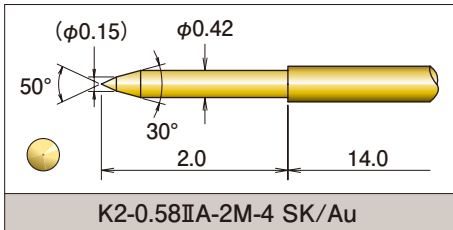

リセプタクル Receptacle

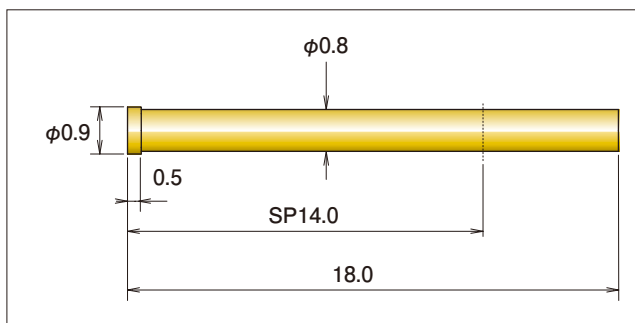

K2-0.58S-1-18L-SP14-2
(S058-140-03)

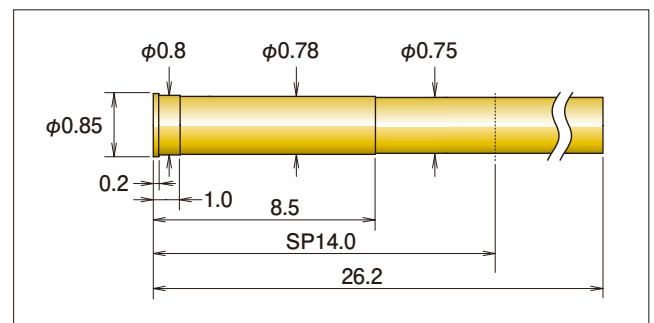

K2-0.58S-3-26.2L-SP14-2
(S058-140-04)