




## What's Rotating Probe?



スプリングピン先端が使用ストローク付近で45回転しフラックスや酸化被膜を貫通することで、確実な接触が得られます。


The KT Series of spring pins have a rotating plunger. The plunger tip rotates 45 degrees as it travels, cutting through any flux on the device under test. This insures better electrical contact with the board.

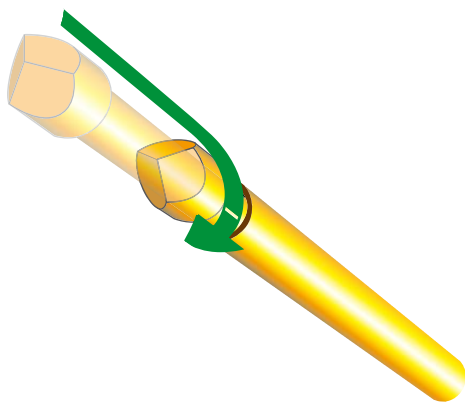



## 1.27mm Pitch

Pin Length: 27.5mm [1.083inch.]

### KT 0.72D 4.5M 1

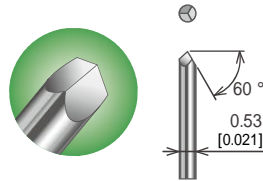

### KT 0.72 6T 4.5M 1

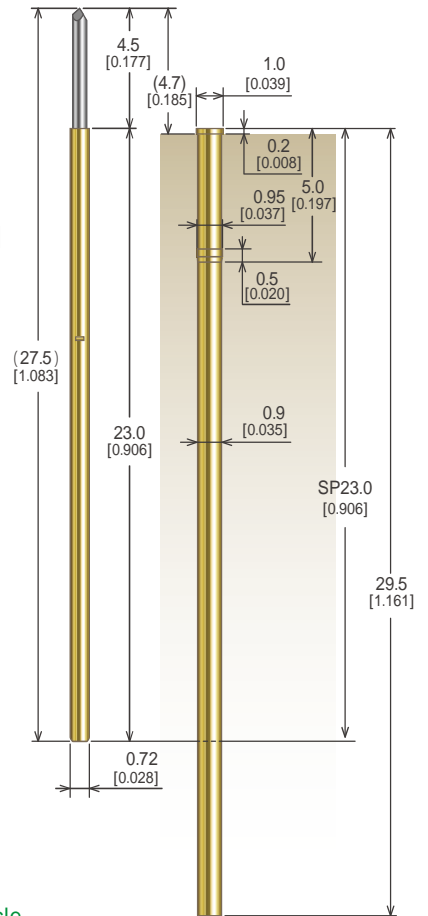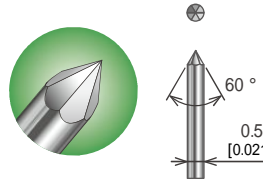

### リセプタクル 品名 Receptacle

K2-0.72S-29.5L-SP23.0  
(末端加工無し / No Termination)



### リセプタクル仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------

### スプリングピン仕様 Spring Pin Specifications

推奨ストローク Operating Travel	3.0 mm [0.118 inch]
荷重 Spring Force at Operating Travel	50gf [1.76oz.]
最大ストローク Max Travel	4.5 mm [0.177 inch]

Material/Finish	
Plunger	SK (Steel) / Rhodium
Barrel	Brass / Au
Spring	Music wire/ Au