


# KT series

## ターンプローブ NEW


### 1.9mm Pitch

Pin Length: 33.0mm [1.299inch.]

■ KT 1.0E 8.0M1.0 1

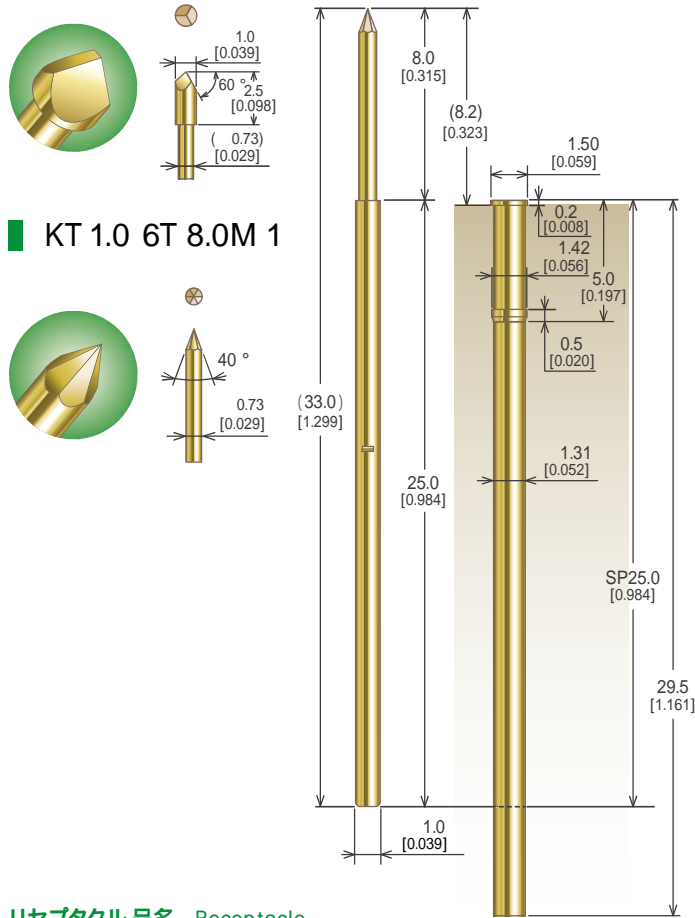

リセプタクル 品名 Receptacle



リセプタクル仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------

スプリングピン仕様 Spring Pin Specifications


推奨ストローク Operating Travel	3.8 mm [0.150 inch]
荷重 Spring Force at Operating Travel	140gf [4.94oz.]
最大ストローク Max Travel	5.5 mm [0.217 inch]

Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Brass / Au
Spring	Music Wire / Au
Ball	Brass / Au

### 2.54mm Pitch

Pin Length: 32.9mm [1.295inch.]

■ KT 1.37E 8.4M 1.4 3

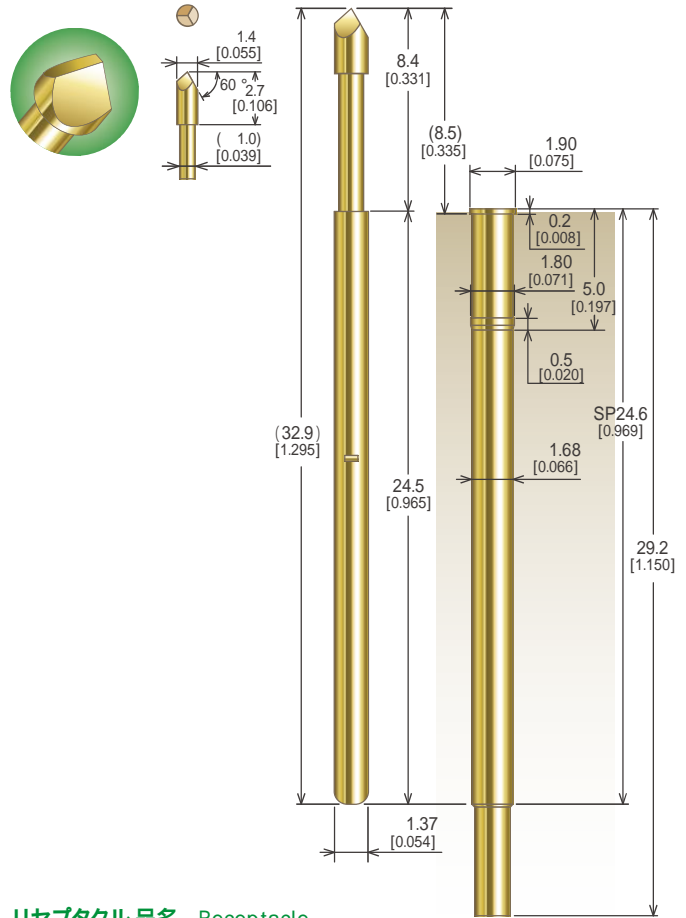

リセプタクル 品名 Receptacle



リセプタクル仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------

スプリングピン仕様 Spring Pin Specifications

推奨ストローク Operating Travel	3.75 mm [0.148 inch]
荷重 Spring Force at Operating Travel	180gf [6.34oz.]
最大ストローク Max Travel	5.7 mm [0.224 inch]

Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Nickel Silver / Au
Spring	Music Wire / Au
Ball	Brass / Au