


K2-0.26II Series for 0.5mm [20mil] Pitch


K2-0.26II Series Plunger Tip Styles

Unit: mm [inch]


Probe Length: 14.5mm [0.571inch]




K2-0.26II CA-4.5M0.3-8




K2-0.26II CH-4.5M0.3-4




K2-0.26II CR-4.5M0.3-3



K2-0.26II G-4.5M0.3-1




K2-0.26II LC-4.5M0.3-1




K2-0.26II U-4.5M0.3-1

K2-0.26II Series Plunger Tip Styles


Probe Length: 12.0mm [0.472inch]



K2-0.26II A-2M-5





K2-0.26II H-2M-1



K2-0.26II Q-2M-5

Spring Probe Receptacle Spring Probe

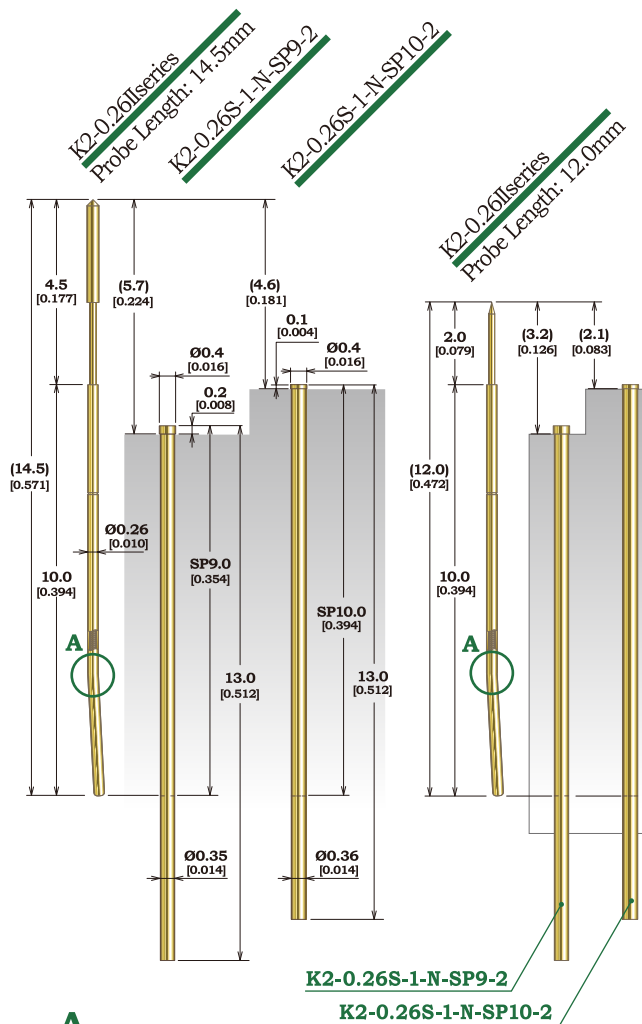

抜け止め用曲げ加工付
Bending for retention

Standard Type

スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	1.32mm [0.052 inch]
荷重 Spring Force at Operating Travel	16gf [0.56oz.]
初期荷重 Initial Force	3gf [0.11oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	20万回 (200K Cycles)
抵抗値 Resistance (Typ.)	250mΩ
最大許容電流値 Current Rating (Typ.)	Probe Length: 14.5mm 1.5A Probe Length: 12.0mm 1.7A
使用温度 Operating Temp.	-45°C~125°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Au Clad
Spring	Music Wire / Au

リセプタクル 品名 Receptacle

K2-0.26S-1-N-SP9-2
(末端加工無し / No Termination)

K2-0.26S-1-N-SP10-2
(末端加工無し / No Termination)

リセプタクル仕様 Receptacle Specifications

Material/Finish	Phosphor Bronze / Au
-----------------	----------------------