


K2-0.26II Series for 0.5mm [20mil] Pitch


K2-0.26II Series Plunger Tip Styles

Probe Length: 14.5mm [0.571inch]

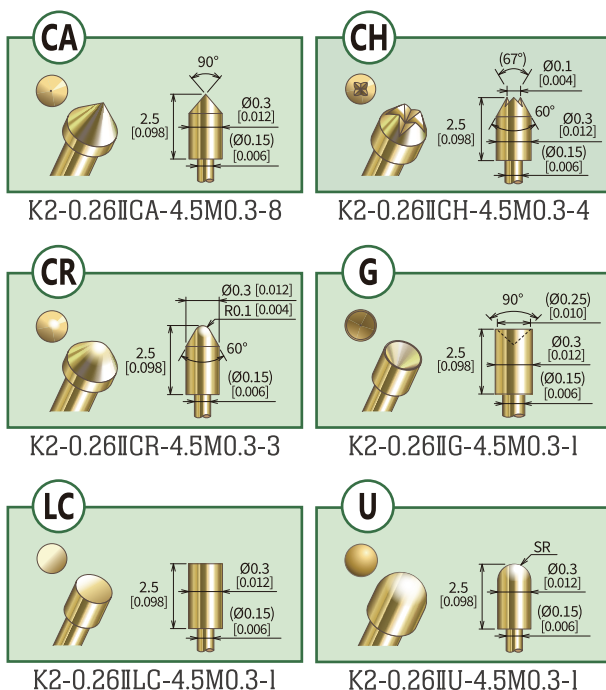


K2-0.26II Series Plunger Tip Styles

Probe Length: 12.0mm [0.472inch]

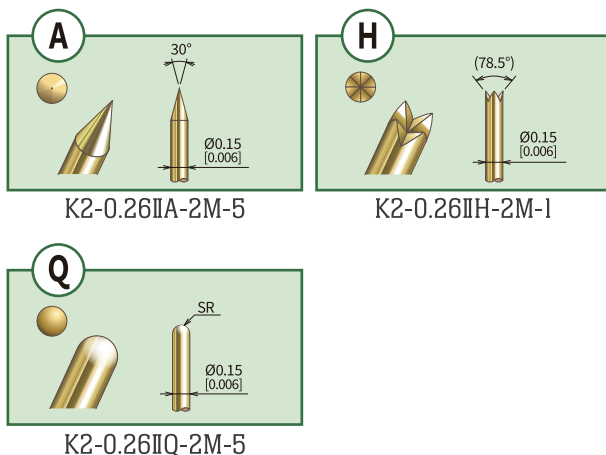

Unit: mm [inch]

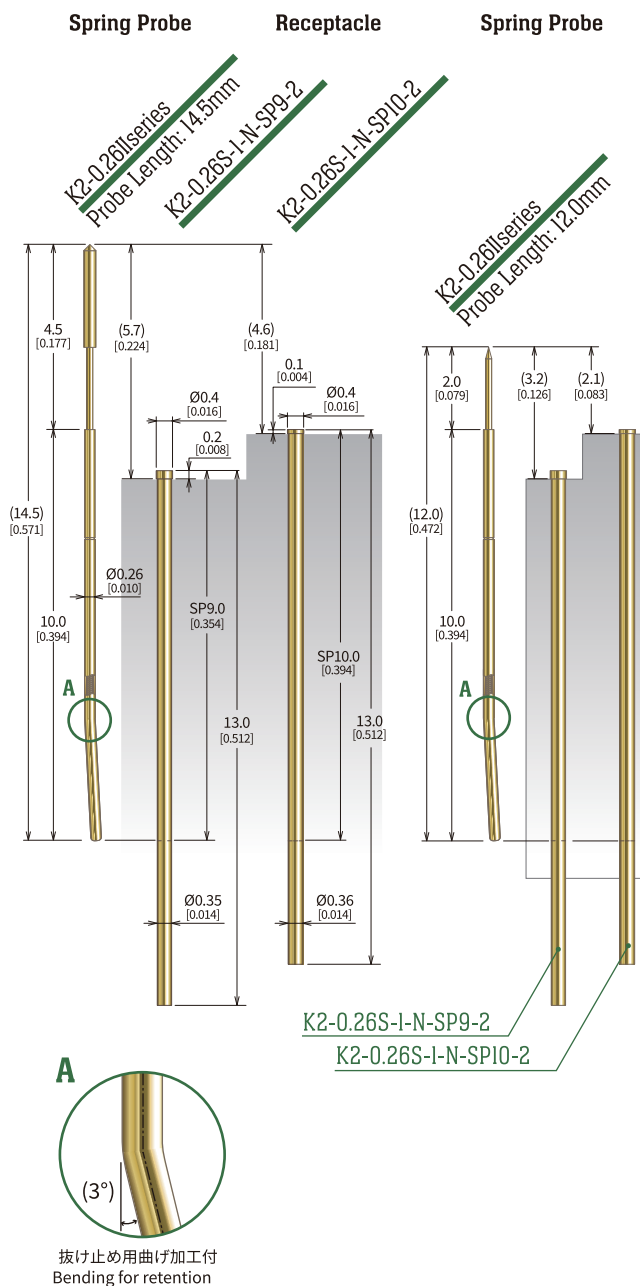

スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	1.32mm [0.052 inch]
荷重 Spring Force at Operating Travel	16gf [0.56oz.]
初期荷重 Initial Force	3gf [0.11oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	20万回 (200K Cycles)
抵抗値 Resistance (Typ.)	250mΩ
最大許容電流値 Current Rating (Typ.)	Probe Length: 14.5mm 1.5A Probe Length: 12.0mm 1.7A
使用温度 Operating Temp.	-40°C~120°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Au Clad
Spring	Music Wire / Au

リセプタクル 品名 Receptacle

K2-0.26S-I-N-SP9-2
(末端加工無し / No Termination)

K2-0.26S-I-N-SP10-2
(末端加工無し / No Termination)

リセプタクル仕様 Receptacle Specifications

Material/Finish	Phosphor Bronze / Au
-----------------	----------------------

*All specifications are subject to change without notice.