K2-0.3III Series for 0.7mm [28mil] Pitch

Unit: mm [inch]

K2-0.3III Series Plunger Tip Styles

Probe Length: 14.5mm [0.571inch]



K2-0.3IIICA-4.5M0.34-9



K2-0.3IIICH-4.5M0.34-7



K2-0.3IIIG-4.5M0.34-5



K2-0.3IIIU-4.5M0.34-3

K2-0.3III Series Plunger Tip Styles

Probe Length: 12.0mm [0.472inch]



K2-0.3IIIA-2M-11



K2-0.3IIIAH-2M-4



K2-0.3IIIF-2M-3



K2-0.3IIIH-2M-11



K2-0.3IIIQ-2M-5

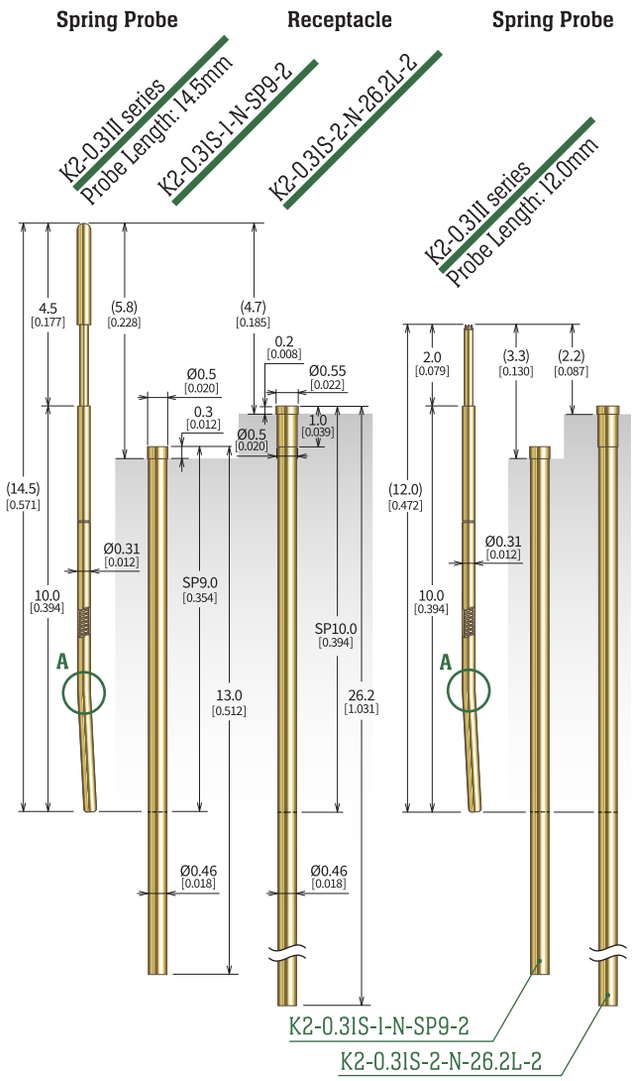



抜け止め用曲げ加工付
Bending for retention

スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	25gf [0.88oz.]
初期荷重 Initial Force	5.5gf [0.18oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数Life Span at Operating Travel	20万回（200K Cycles)
抵抗値 Resistance (Typ.)	200mΩ
最大許容電流値 Current Rating (Typ.)	Probe Length: 14.5mm 2.3A
	Probe Length: 12.0mm 1.9A
使用温度 Operating Temp.	-40°C~120°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Au Clad
Spring	Music Wire / Au

リセプタクル 品名 Receptacle

K2-0.3IS-1-N-SP9-2
(末端加工無し / No Termination)

K2-0.3IS-2-N-26.2L-2
(末端加工無し / No Termination)

リセプタクル仕様 Receptacle Specifications

Material/Finish	Phosphor Bronze / Au

*All specifications are subject to change without notice.

Standard Type