


K2-0.42II Series for 0.8mm [31mil] Pitch

K2-0.42II Series Plunger Tip Styles

Unit: mm [inch]

Probe Length: 19.1mm [0.752inch]

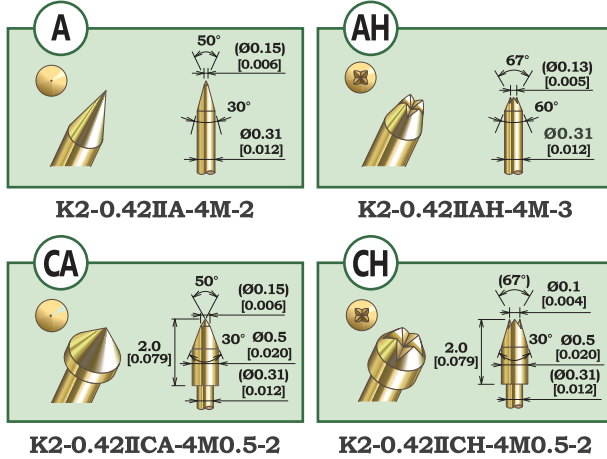


Spring Probe

Receptacle

K2-0.42II series

K2-0.42S-SP14-21L

K2-0.42S-SP14-24L

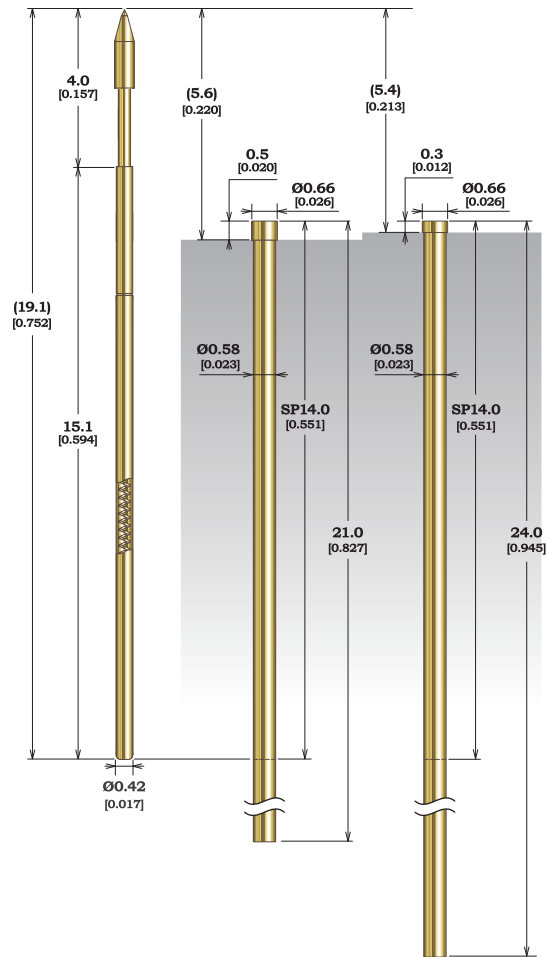

Standard Type

■ スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	55gf [1.94oz.]
初期荷重 Initial Force	30gf [1.06oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	100万回 (1,000K Cycles)
抵抗値 Resistance (Typ.)	100mΩ
最大許容電流値 Current Rating (Typ.)	3.2A
使用温度 Operating Temp.	-45°C~125°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Au-Clad
Spring	Music Wire / Au

■ リセプタクル品名 Receptacle

K2-0.42S-SP14-21L

(末端加工無し / No Termination)



K2-0.42S-SP14-24L

(末端加工無し / No Termination)



■ リセプタクル仕様 Receptacle Specifications

Material/Finish	Phosphor Bronze / Au
-----------------	----------------------