


Standard Type


Unit: mm [inch]

Spring Probe


Receptacle

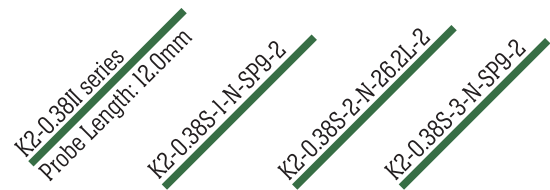

K2-0.38IIAH-2M-7

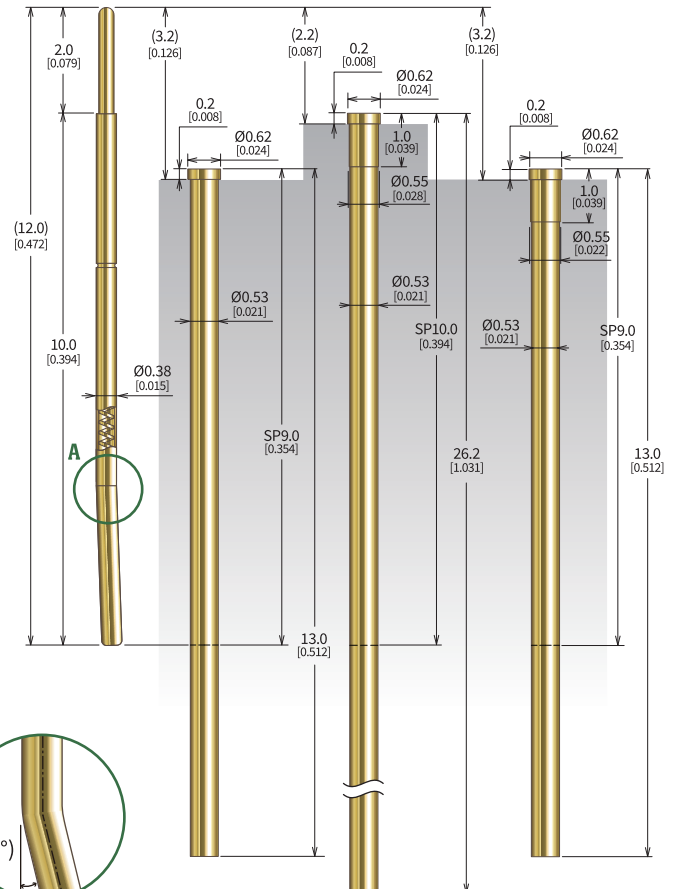

K2-0.38IIH-2M-5



抜け止め用曲げ加工付
Bending for retention

■ リセプタクル 品名 Receptacle

(末端加工無し / No Termination)

Material/Finish


Brass / Au

K2-0.38II Series for 0.8mm [31mil] Pitch


Unit: mm [inch]

K2-0.38II Series Plunger Tip Styles


Probe Length: 14.5mm [0.571inch]




K2-0.38II CA-4.5M0.4-7




K2-0.38II CH-4.5M0.4-12




K2-0.38II G-4.5M0.4-9



K2-0.38II LC-4.5M0.4-5




K2-0.38II U-4.5M0.4-5



Spring Probe

Receptacle

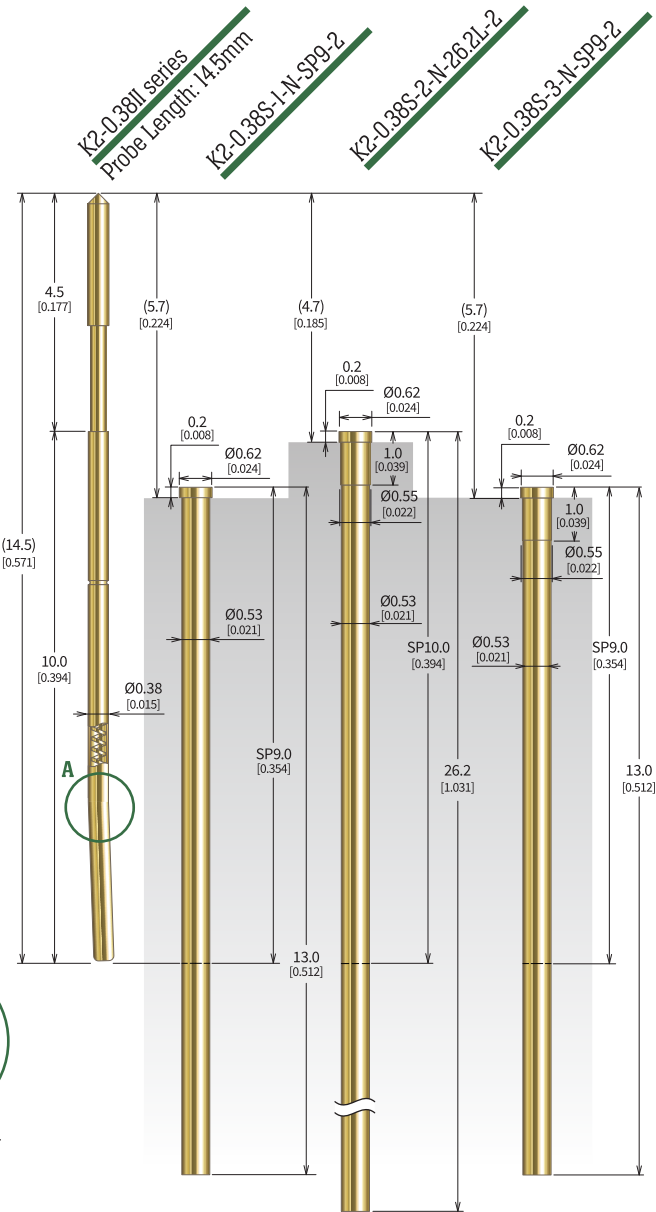

Standard Type

スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	33gf [1.16oz.]
初期荷重 Initial Force	18gf [0.63oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	100 万回 (1,000K Cycles)
抵抗値 Resistance (Typ.)	100mΩ
最大許容電流値 Current Rating (Typ.)	2.8A
使用温度 Operating Temp.	-40°C~120°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Phosphor Bronze /Au
Spring	Music Wire /Au

リセプタクル 品名 Receptacle

K2-0.38S-1-N-SP9-2
(末端加工無し / No Termination)



K2-0.38S-2-N-26.2L-2
(末端加工無し / No Termination)



K2-0.38S-3-N-SP9-2
(末端加工無し / No Termination)



リセプタクル 仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------

*All specifications are subject to change without notice.