


K2-0.58II Series for 1.0mm [39mil] Pitch

Unit: mm [inch]

K2-0.58II Series Plunger Tip Styles

Probe Length: 16.0mm [0.630inch]

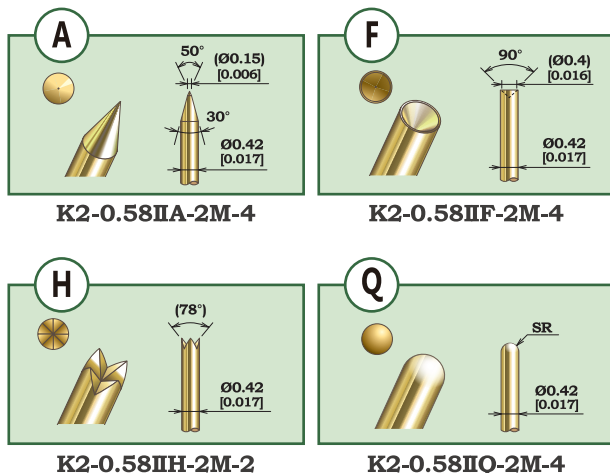

K2-0.58IIA-2M-4


K2-0.58IIF-2M-4

K2-0.58IIH-2M-2

K2-0.58IIQ-2M-4

Spring Probe

Receptacle

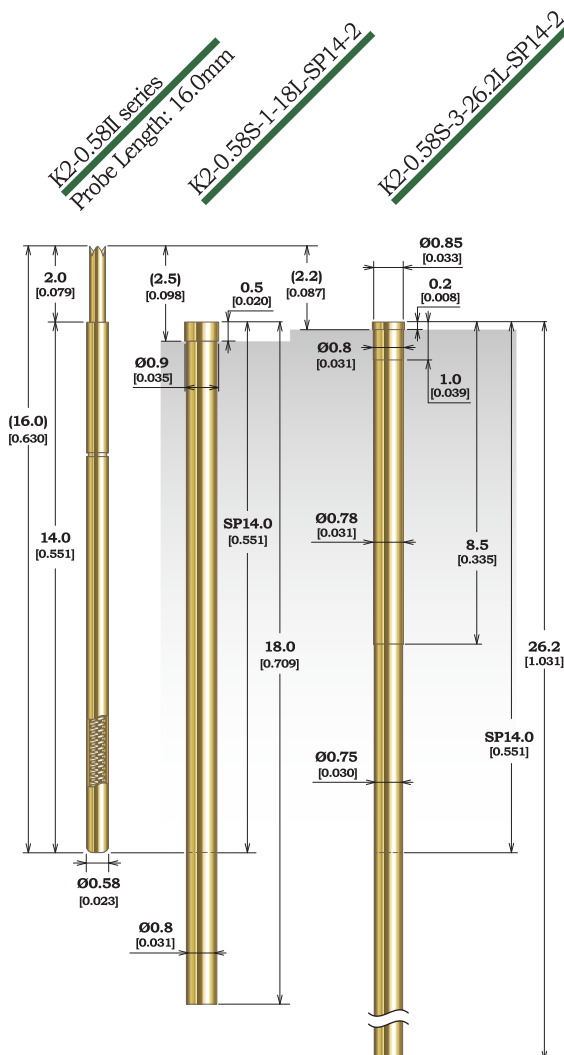

■ スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	50gf [1.76oz.]
初期荷重 Initial Force	26gf [0.92oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	100 万回 (1,000K Cycles)
抵抗値 Resistance (Typ.)	60mΩ
最大許容電流値 Current Rating (Typ.)	4.3A
使用温度 Operating Temp.	-45°C~125°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Brass / Au
Spring	Music Wire / Au

■ リセプタクル 品名 Receptacle



■ リセプタクル仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------


*All specifications are subject to change without notice.

K2-0.48II Series for 1.0mm [39mil] Pitch

Unit: mm [inch]


K2-0.48II Series Plunger Tip Styles

Probe Length: 17.0mm [0.669inch]

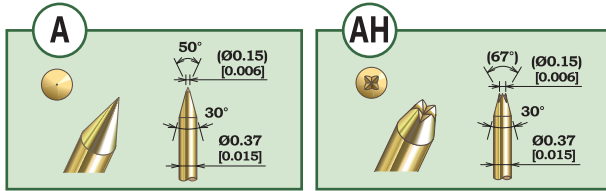

K2-0.48IIA-2M-2

K2-0.48IIAH-2M-3

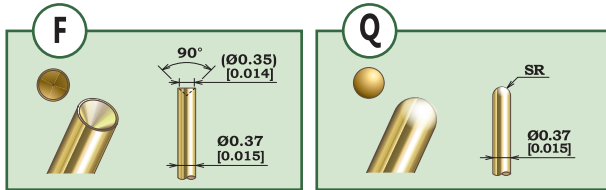


K2-0.48IIF-2M-2

K2-0.48IIQ-2M-3

Spring Probe

Receptacle

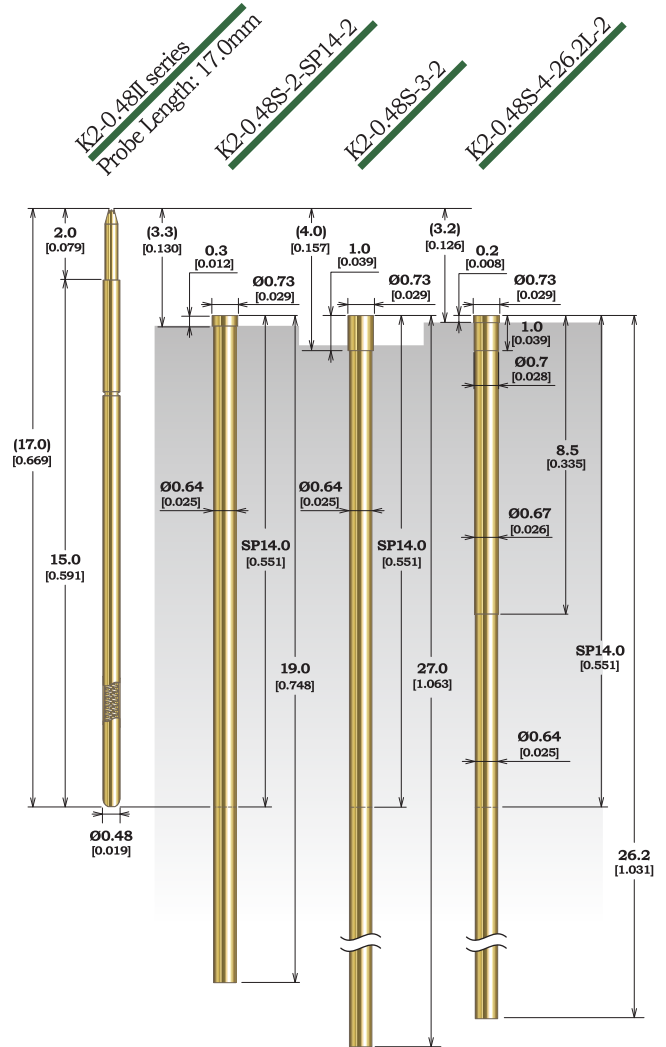

スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	50gf [1.76oz.]
初期荷重 Initial Force	26gf [0.92oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	100 万回 (1,000K Cycles)
抵抗値 Resistance (Typ.)	100mΩ
最大許容電流値 Current Rating (Typ.)	5.1A
使用温度 Operating Temp.	-45°C~125°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Phosphor Bronze /Au
Spring	Music Wire / Au

リセプタクル 品名 Receptacle

K2-0.48S-2-SP14-2

(末端加工無し / No Termination)

K2-0.48S-3-2

(末端加工無し / No Termination)

K2-0.48S-4-26.2L-2

(末端加工無し / No Termination)

リセプタクル仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------