


K2-0.68II Series for 1.27mm [50mil] Pitch


Unit: mm [inch]

K2-0.68II Series Plunger Tip Styles


Probe Length: 16.7mm [0.657inch]



K2-0.68IIA-3.5M-5




K2-0.68IIAH-3.5M-2




K2-0.68IIF-3.5M-5

K2-0.68II Series Plunger Tip Styles


Probe Length: 15.2mm [0.598inch]




K2-0.68IIA-2M-5



K2-0.68IIAR-2M-9



K2-0.68IIQ-2M-5

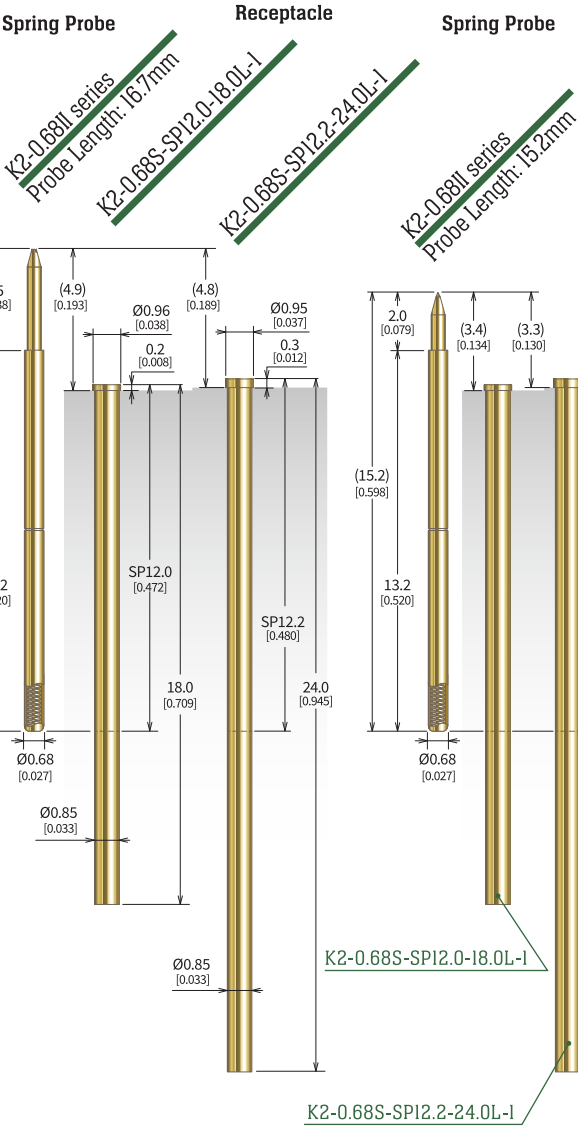

Standard Type

■ スプリングプローブ仕様 Spring Probe Specifications

スプリングプローブ全長 Probe Length	16.7mm [0.657inch]	15.2mm [0.598inch]
推奨ストローク Operating Travel	2.2mm [0.087inch]	1.33mm [0.052inch]
荷重 Spring Force at Operating Travel	70gf [2.47oz.]	70gf [2.47oz.]
初期荷重 Initial Force	20gf [0.71oz.]	35gf [0.23oz.]
最大ストローク Max Travel	3.3mm [0.130inch]	2.0mm [0.079inch]
スプリング耐久回数 Life Span at Operating Travel	20 万回 (200K Cycles)	50 万回 (500K Cycles)
抵抗値 Resistance (Typ.)	100mΩ	100mΩ
最大許容電流値 Current Rating (Typ.)	4.2A	5.8A
使用温度 Operating Temp.	-40°C~120°C	-40°C~120°C
Material/Finish		
Plunger	SK (Steel) / Au	
Barrel	Nickel Silver / Au	
Spring	Music Wire / Au	

■ リセプタクル 品名 Receptacle

K2-0.68S-SPI2.0-18.0L-I

(末端加工無し / No Termination)

K2-0.68S-SPI2.2-24.0L-I

(末端加工無し / No Termination)

K2-0.68S-SPI2.2-24.0L-I-U

(ソルダーカップ付 / with Solder Cup)



■ リセプタクル仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------

K2-0.68II Series for 1.27mm [50mil] Pitch


K2-0.68II Series Plunger Tip Styles

Probe Length: 17.7mm [0.697inch]

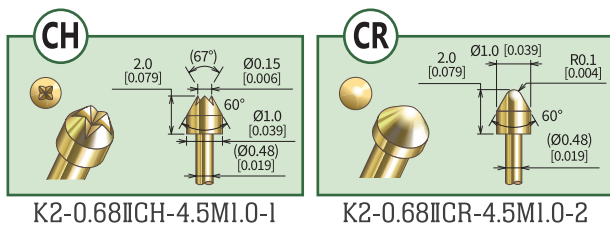

K2-0.68II Series Plunger Tip Styles


Probe Length: 17.2mm [0.677inch]

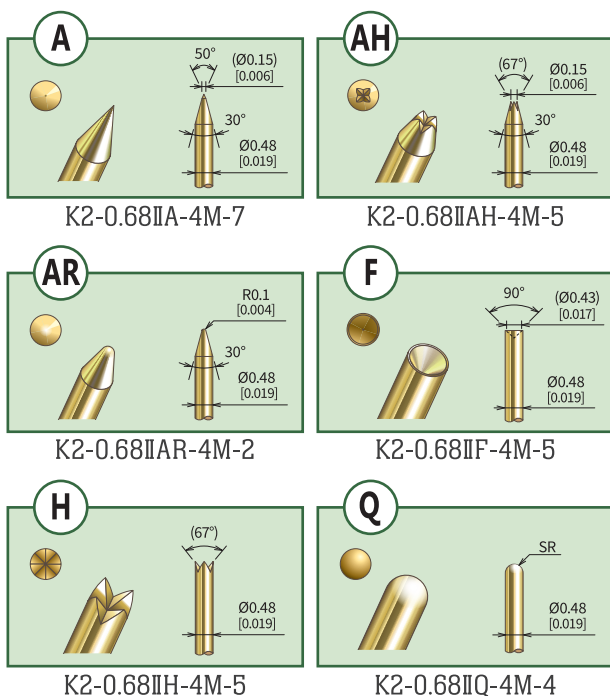

■ スプリングプローブ仕様 Spring Probe Specifications

スプリングプローブ全長 Probe Length	17.7mm [0.697inch]	17.2mm [0.677inch]
推奨ストローク Operating Travel	1.67mm [0.066inch]	2.2mm [0.087inch]
荷重 Spring Force at Operating Travel	66gf [2.33oz.]	59gf [2.08oz.]
初期荷重 Initial Force	22gf [0.78oz.]	9gf [0.32oz.]
最大ストローク Max Travel	2.5mm [0.098inch]	3.3mm [0.130inch]
スプリング耐久回数 Life Span at Operating Travel	10万回 (100K Cycles)	10万回 (100K Cycles)
抵抗値 Resistance (Typ.)	100mΩ	100mΩ
最大許容電流値 Current Rating (Typ.)	5.7A	3.9A
使用温度 Operating Temp.	-40°C~120°C	-40°C~120°C
Material/Finish		
Plunger	SK (Steel) / Au	
Barrel	Nickel Silver / Au	
Spring	Music Wire / Au	

Unit: mm [inch]

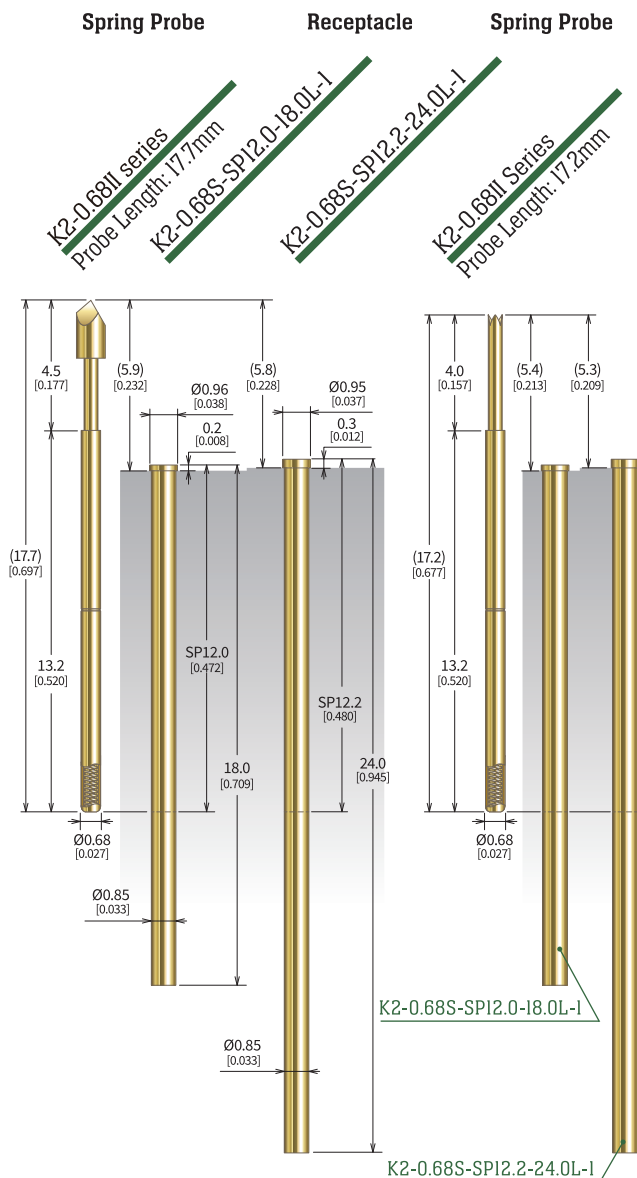

■ リセプタクル 品名 Receptacle

K2-0.68S-SP12.0-18.0L-1
(末端加工無し / No Termination)



K2-0.68S-SP12.2-24.0L-1
(末端加工無し / No Termination)



K2-0.68S-SP12.2-24.0L-1-U
(ソルダーカップ付 / with Solder Cup)



■ リセプタクル 仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------

*All specifications are subject to change without notice.