


K2-0.68III Series for 1.27mm [50mil] Pitch


Unit: mm [inch]

K2-0.68III Series Plunger Tip Styles


Probe Length: 24.6mm [0.969inch]




K2-0.68III A-6.3M-3




K2-0.68III CA-6.3M1.2-3




K2-0.68III F-6.3M-4




K2-0.68III G-6.3M1.2-3




K2-0.68III H-6.3M-3




K2-0.68III K-6.3M1.2-3



K2-0.68III L-6.3M1.2-3




K2-0.68III Q-6.3M-4



K2-0.68III U-6.3M1.2-3

Spring Probe

Receptacle

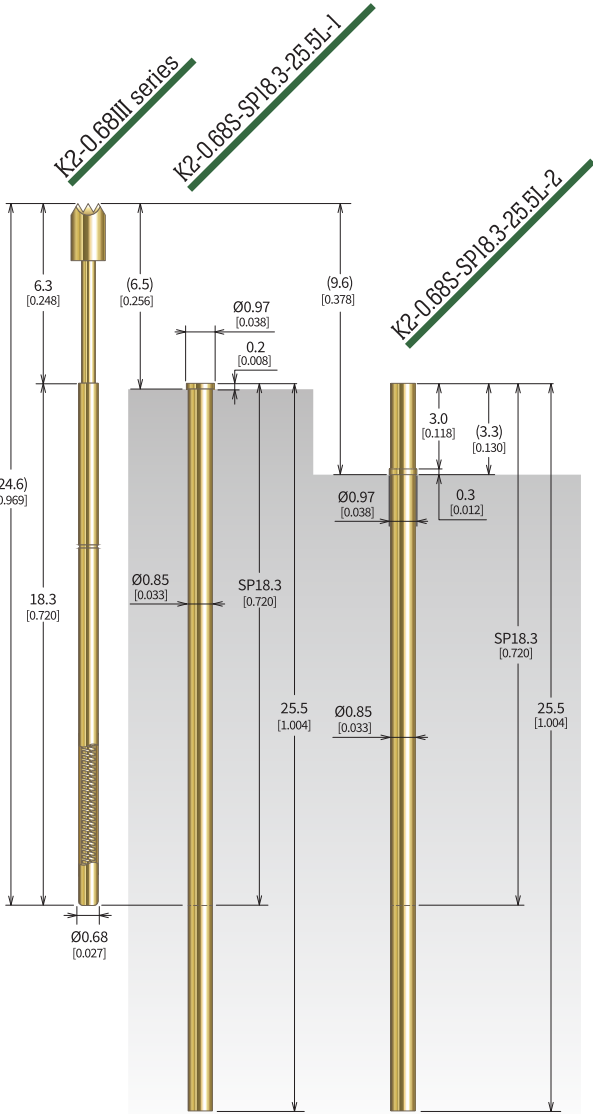

Standard Type

スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	2.87mm [0.113 inch]
荷重 Spring Force at Operating Travel	80gf [2.82oz.]
初期荷重 Initial Force	27gf [0.95oz.]
最大ストローク Max Travel	4.3mm [0.169 inch]
スプリング耐久回数 Life Span at Operating Travel	10 万回 (100K Cycles)
抵抗値 Resistance (Typ.)	60mΩ
最大許容電流値 Current Rating (Typ.)	5.1A
使用温度 Operating Temp.	-40°C~120°C
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Phosphor Bronze / Au
Spring	Music Wire / Au

リセプタクル 品名 Receptacle

K2-0.68S-SP18.3-25.5L-1
(末端加工無し / No Termination)

K2-0.68S-SP18.3-25.5L-2
(末端加工無し / No Termination)

リセプタクル 仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------



*All specifications are subject to change without notice.

K2-0.72II Series for 1.27mm [50mil] Pitch

K2-0.72II Series Plunger Tip Styles

Probe Length: 22.8mm [0.898inch]

Unit: mm [inch]

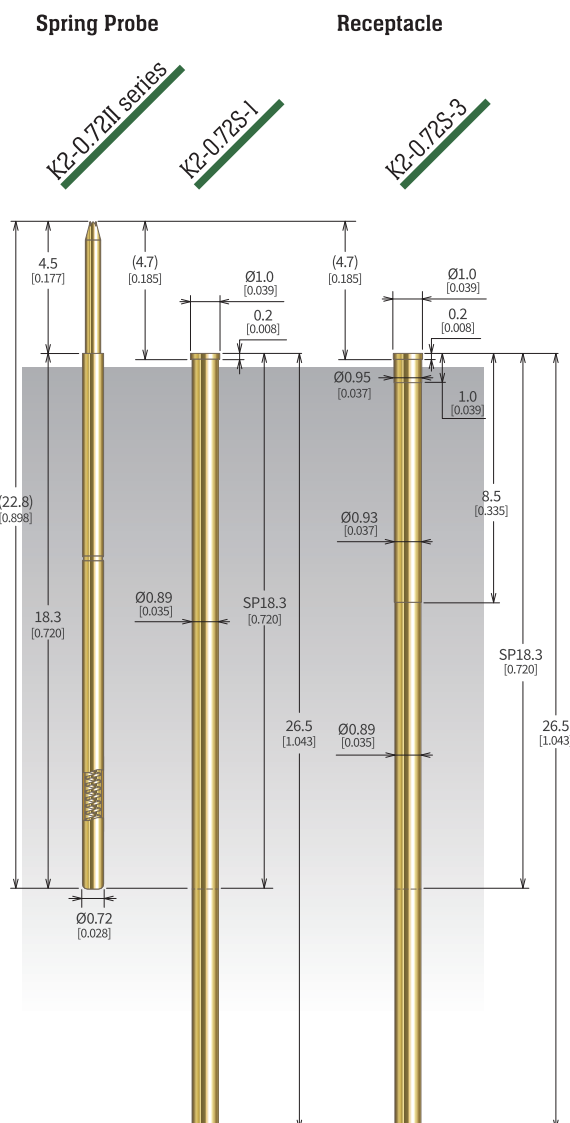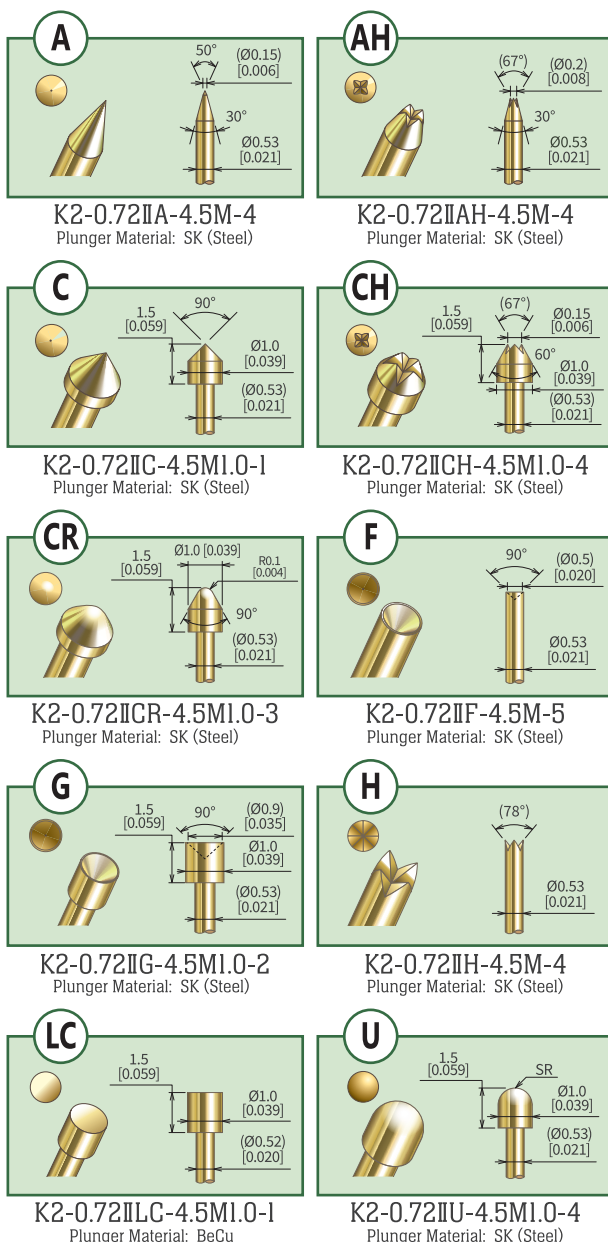

スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	2.0mm [0.079 inch]
荷重 Spring Force at Operating Travel	80gf [2.82oz.]
初期荷重 Initial Force	33gf [1.16oz.]
最大ストローク Max Travel	3.0mm [0.118 inch]
スプリング耐久回数 Life Span at Operating Travel	100万回 (1,000K Cycles)
抵抗値 Resistance (Typ.)	50mΩ
最大許容電流値 Current Rating (Typ.)	4.4A
使用温度 Operating Temp.	-40°C~120°C

Material/Finish	
Plunger	SK (Steel) or BeCu / Au
Barrel	Phosphor Bronze / Au
Spring	Music Wire / Au

リセプタクル 品名 Receptacle

K2-0.72S-1
(末端加工無し / No Termination)

K2-0.72S-1-U
(ソルダーカップ付 / with Solder Cup)

K2-0.72S-3
(末端加工無し / No Termination)

K2-0.72S-3-I-U
(ソルダーカップ付 / with Solder Cup)

リセプタクル仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------

*All specifications are subject to change without notice.