
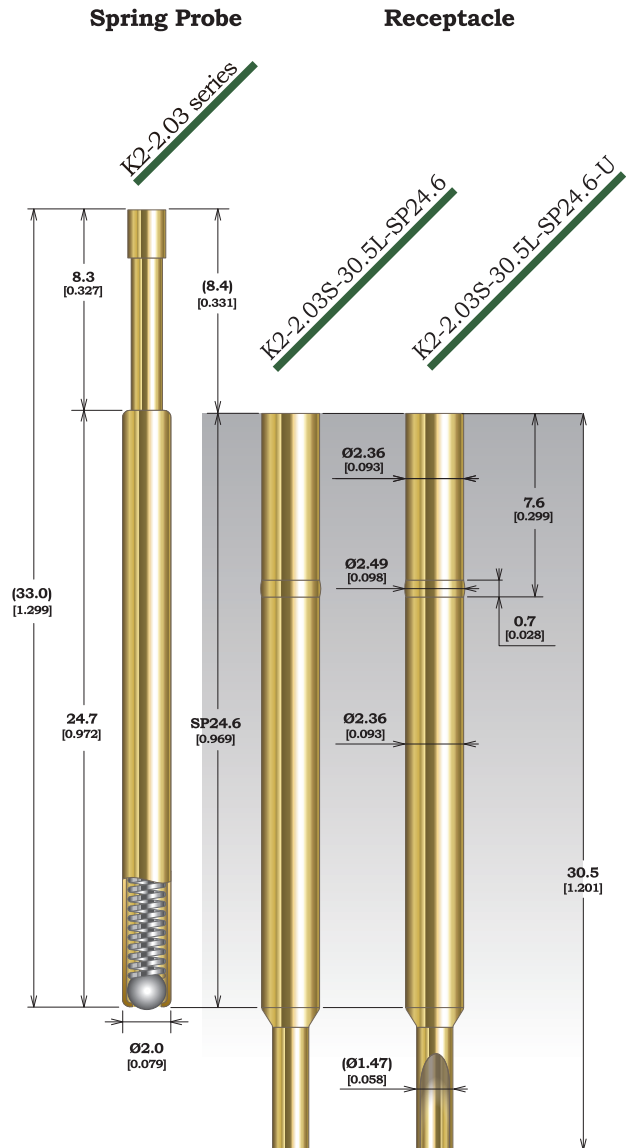


# K2-2.03 Series for 3.0mm [118mil] Pitch

## K2-2.03 Series Plunger Tip Styles

Unit: mm [inch]

Probe Length: 33.0mm [1.299inch]

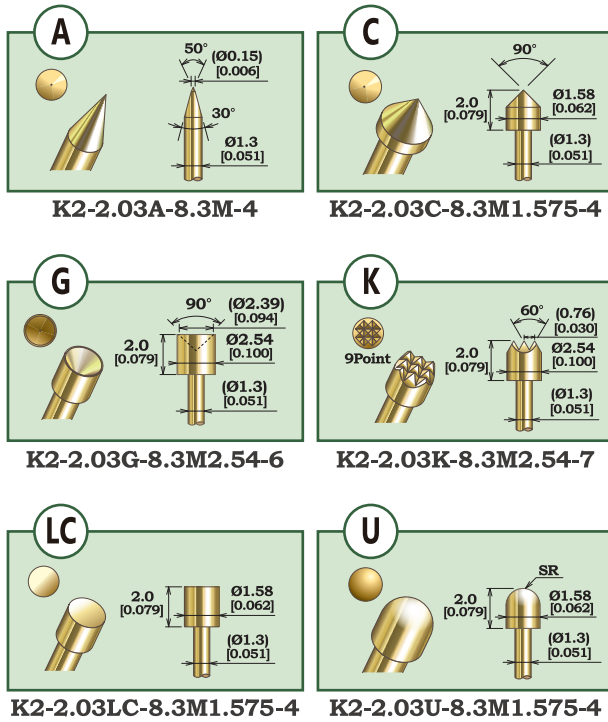

Standard Type

## スプリングプローブ仕様 Spring Probe Specifications

推奨ストローク Operating Travel	4.2mm [ 0.165 inch ]
荷重 Spring Force at Operating Travel	200gf [ 7.05oz. ]
初期荷重 Initial Force	77gf [ 2.72oz. ]
最大ストローク Max Travel	6.3mm [ 0.248 inch ]
スプリング耐久回数 Life Span at Operating Travel	100万回 (1,000K Cycles)
抵抗値 Resistance (Typ.)	35mΩ
最大許容電流値 Current Rating (Typ.)	5.9A
使用温度 Operating Temp.	-45°C~140°C
Material/Finish	
Plunger	BeCu / Au
Barrel	Brass /Au
Spring	Stainless Steel / -
Ball	Stainless Steel / -

## リセプタクル 品名 Receptacle

### K2-2.03S-30.5L-SP24.6

(末端加工無し / No Termination)



### K2-2.03S-30.5L-SP24.6-U

(ソルダーカップ付 / with Solder Cup)



## リセプタクル仕様 Receptacle Specifications

Material/Finish	Nickel Silver / Au
-----------------	--------------------