


K2-0.42II Series for 0.8mm [31mil] Pitch


K2 0.42 Series Plunger Tip Styles

Pin Length: 19.1mm [0.752inch.]


Unit: mm [inch]




K2-0.42 II A-4M-2



K2-0.42 II AH-4M-3



K2-0.42 II CA-4M0.5-2



K2-0.42 II CH-4M0.5-2


Spring Pin

Receptacle

K2-0.42II series

K2-0.42S-SP14-21L

K2-0.42S-SP14-24L

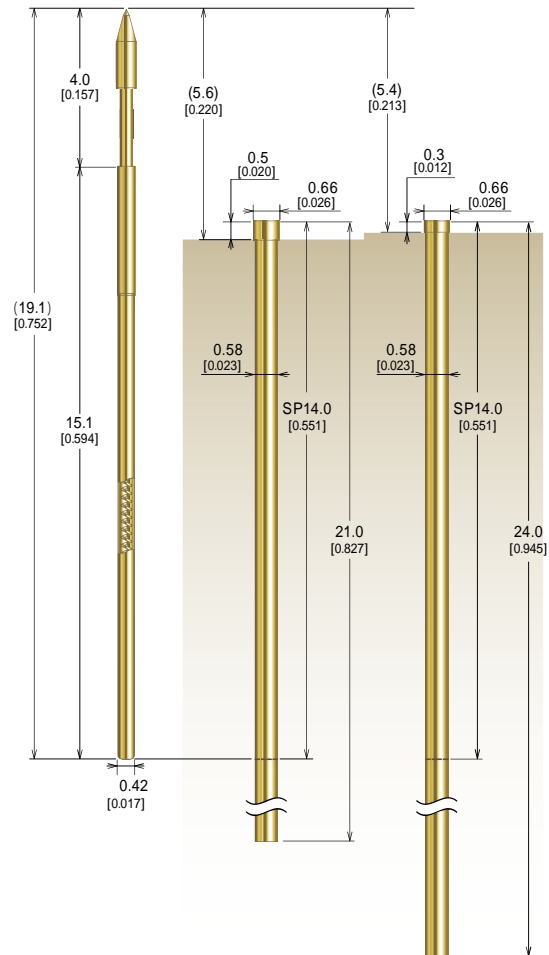

スプリングピン仕様 Spring Pin Specifications

| | |
|---|------------------------|
| 推奨ストローク Operating Travel | 1.33mm [0.052 inch] |
| 荷重 Spring Force at Operating Travel | 55gf [1.94oz.] |
| 初期荷重 Initial Force | 30gf [1.06oz.] |
| 最大ストローク Max Travel | 2.0mm [0.079 inch] |
| スプリング耐久回数 Life Span at Operating Travel | 100万回 (1,000K Cycles) |
| 抵抗値 Resistance (Typ.) | 100m |
| 最大許容電流値 Current Rating (Typ.) | 3.2A |
| 使用温度 Operating Temp. | 45 125 |
| Material/Finish | |
| Plunger | SK (Steel) / Au |
| Barrel | Au Clad |
| Spring | Music Wire / Au |

リセプタクル品名 Receptacle

K2 0.42S SP14 21L
(末端加工無し / No Termination)



K2 0.42S SP14 24L
(末端加工無し / No Termination)



リセプタクル仕様 Receptacle Specifications

Material/Finish Phosphor Bronze / Au

*All specifications are subject to change without notice.