


K2-0.68Ⅲ Series for 1.27mm [50mil] Pitch


K2 0.68 Series Plunger Tip Styles

Pin Length: 24.6mm [0.969inch.]


Unit: mm [inch]




K2-0.68Ⅲ A-6.3M-3




K2-0.68Ⅲ CA-6.3M1.2-3




K2-0.68Ⅲ F-6.3M-4




K2-0.68Ⅲ G-6.3M1.2-3




K2-0.68Ⅲ H-6.3M-3




K2-0.68Ⅲ K-6.3M1.2-3



K2-0.68Ⅲ L-6.3M1.2-3




K2-0.68Ⅲ Q-6.3M-4



K2-0.68Ⅲ U-6.3M1.2-3

Spring Pin

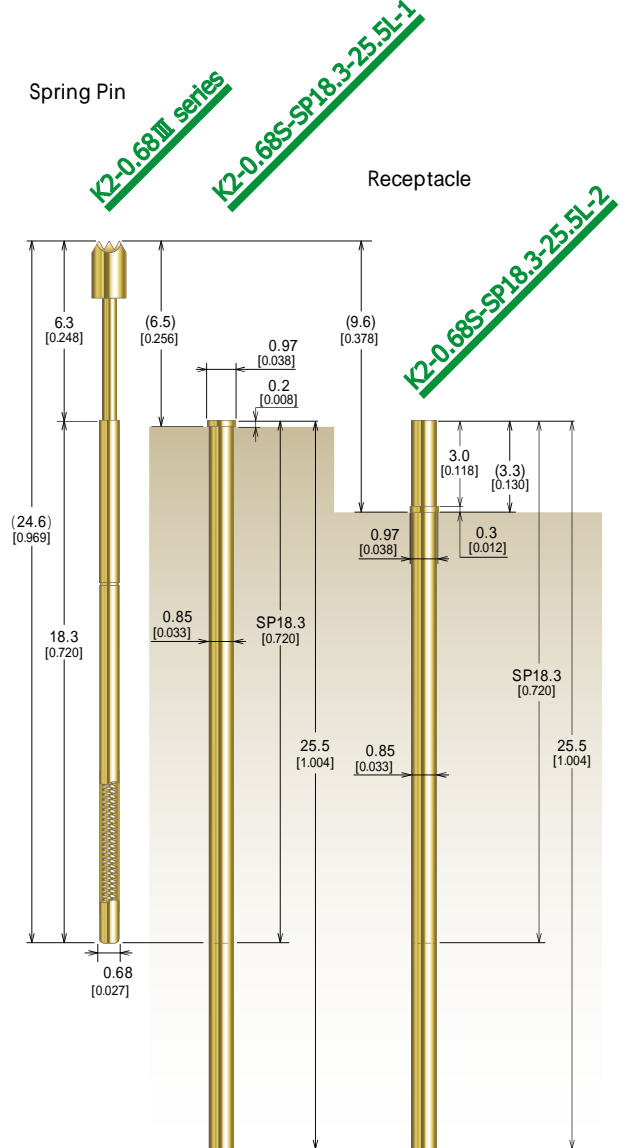

スプリングピン仕様 Spring Pin Specifications

| | |
|---|---------------------|
| 推奨ストローク Operating Travel | 2.87mm [0.113 inch] |
| 荷重 Spring Force at Operating Travel | 80gf [2.82oz.] |
| 初期荷重 Initial Force | 27gf [0.95oz.] |
| 最大ストローク Max Travel | 4.3mm [0.169 inch] |
| スプリング耐久回数 Life Span at Operating Travel | 10万回 (100K Cycles) |
| 抵抗値 Resistance (Typ.) | 60m |
| 最大許容電流値 Current Rating (Typ.) | 5.1A |
| 使用温度 Operating Temp. | 45 125 |
| Material/Finish | |
| Plunger | SK (Steel) / Au |
| Barrel | Phosphor Bronze/ Au |
| Spring | Music Wire / Au |

リセプタクル品名 Receptacle

K2 0.68S SP18.3 25.5L 1
(末端加工無し / No Termination)

K2 0.68S SP18.3 25.5L 2
(末端加工無し / No Termination)

リセプタクル仕様 Receptacle Specifications

| | |
|-----------------|------------|
| Material/Finish | Brass / Au |
|-----------------|------------|


*All specifications are subject to change without notice.

K2-0.72II Series for 1.27mm [50mil] Pitch


K2 0.72 Series Plunger Tip Styles

Unit: mm [inch]


Pin Length: 22.8mm [0.898inch.]




K2-0.72 II A-4.5M-4
Plunger Material: SK (Steel)




K2-0.72 II AH-4.5M-4
Plunger Material: SK (Steel)




K2-0.72 II C-4.5M1.0-1
Plunger Material: SK (Steel)




K2-0.72 II CH-4.5M1.0-4
Plunger Material: SK (Steel)




K2-0.72 II CR-4.5M1.0-3
Plunger Material: SK (Steel)




K2-0.72 II F-4.5M-5
Plunger Material: SK (Steel)




K2-0.72 II G-4.5M1.0-2
Plunger Material: SK (Steel)



K2-0.72 II H-4.5M-4
Plunger Material: SK (Steel)




K2-0.72 II LC-4.5M1.0-1
Plunger Material: BeCu



K2-0.72 II U-4.5M1.0-4
Plunger Material: SK (Steel)

スプリングピン仕様 Spring Pin Specifications

| | |
|---|-------------------------|
| 推奨ストローク Operating Travel | 2.0mm [0.079 inch] |
| 荷重 Spring Force at Operating Travel | 80gf [2.82oz.] |
| 初期荷重 Initial Force | 33gf [1.16oz.] |
| 最大ストローク Max Travel | 3.0mm [0.118 inch] |
| スプリング耐久回数 Life Span at Operating Travel | 100万回 (1,000K Cycles) |
| 抵抗値 Resistance (Typ.) | 50m |
| 最大許容電流値 Current Rating (Typ.) | 4.4A |
| 使用温度 Operating Temp. | 45 125 |
| Material/Finish | |
| Plunger | SK (Steel) or BeCu / Au |
| Barrel | Phosphor Bronze / Au |
| Spring | Music Wire / Au |

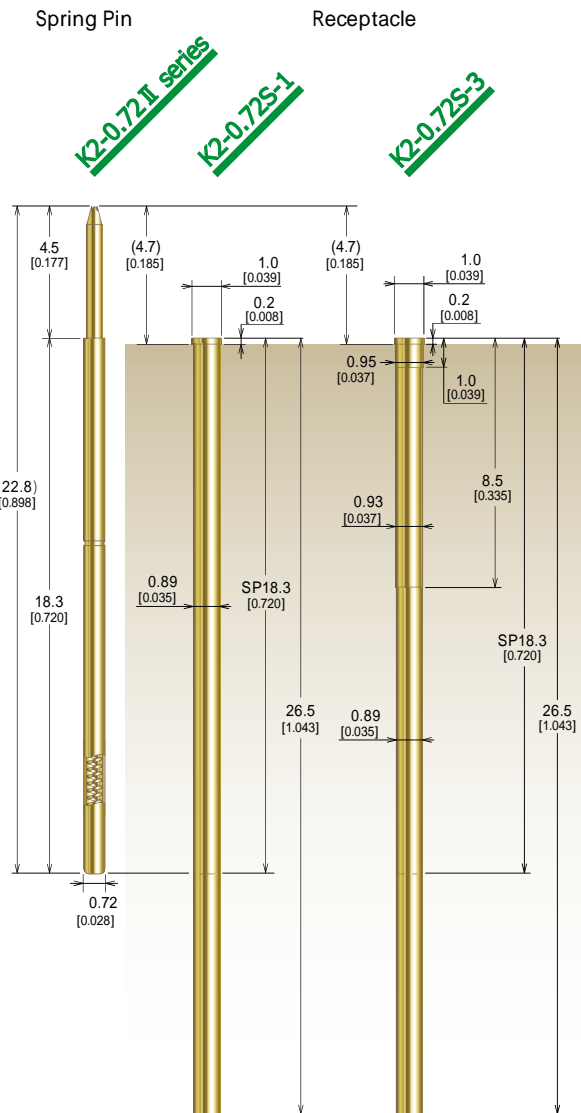

リセプタクル品名 Receptacle

K2 0.72S 1
(末端加工無し / No Termination)



K2 0.72S 1 U
(ソルダーカップ付 / with Solder Cup)



K2 0.72S 3
(末端加工無し / No Termination)



K2 0.72S 3 1 U
(ソルダーカップ付 / with Solder Cup)



リセプタクル仕様 Receptacle Specifications

| | |
|-----------------|------------|
| Material/Finish | Brass / Au |
|-----------------|------------|

*All specifications are subject to change without notice.